Various Wire Products

Gerber Korea Ltd.

Gerber Qingdao (China) Corp.

ITEM	DESCRIPTION	PACKING
From China		
BLACK ANNEALED WIRE	24G, 28G	DIN 200 SPOOLS OF 25 LBS
	19G, 20G,	IN250 LBS COILS WRAPPED AND SECURELY STRAPPED (2 COILS TO A MASTER BUNDLE)
BLACK ANNEALED WIRE	22G	IN 250 LBS COILS WRAPPED AND SECURELY STRAPPED (2 COILS TO A MASTER BUNDLE)
	14G, 18G	IN 500LBS COILS,
	11G, 12G, 13G, 14G, 16G	IN 1500LBS COILS
SOFT ELECTROGALVANIZED WIRE	18G , 19G, 22G,	IN250 LBS/500LBS COILS, 2 COILS TO A MASTER BUNDLE
SOFT GALVANIZED ANNEALED WIRE	23G, 24G, 26G	BB 20 SPOOL OF 38 LBS - 40 LBS. - 50 SPOOLS TO A PALLET.
SOFT GALVANIZED WIRE	16G, 17G,18G, 20G, 38G, 30G,	DIN 100 SPOOLS OF 4 LBS; BB-20 SPOOL OF ABOUT 40 LBS
STAINLESS STEEL T201	.192"	
STAINLESS STEEL T304	.047"	APPROX 440 LB CORES
	.062"	APPROX 440 LB COILS THREE COILS TO A MASTER BUNDLE
	.192"	
	.0276"	
STAINLESS STEEL T305	.0410", .0470",	ON NP-13 SPOOL WITH ABOUT 25 LBS.
STAINLESS STEEL T316L	.0276", .0320",	
CABLE 7 X 7 GAC	1/16", 1/8", 3/16",	2500'/REEL - 74.5LBS; 1000'/REEL - 63 LBS; 5000'/REEL - 45 LBS
CABLE 7 X 7 GALFAN	1/8", 3/16",	1000'/REEL-11 LBS,
CABLE 7 X 19 GALFAN	3/16",	2500'/REEL - 162 LBS
CABLE 7 X 7 SS T304	1/8", 1/16"	1000'/REEL-11 LBS,
CABLE 7 X 19 SS T304	3/16", 1/8"	500'/REEL - 37 LBS, 1000'/REEL - 11 LBS
SOD STAPLES	6"X 1" X 6", 8" x 1" x 8",	1000 PCS PER CARTON, 60 CARTONS TO A PALLET.
ROUND TOP STAPLE	2.7MM DIA X 6" LENGTH,	1000 PCS PER CARTON, 60 CARTONS TO A PALLET.
PINS & WASHERS,	12-1/8", 12",	100 PIECES, 27 PALLETS OF 108 CARTONS
GALVANISED SPRING WIRE	0.71mm	500KG/SPOOL
GALVANISED STITCHING WIRE	0.55mm	15KG/SPOOL
From Vietnam		
BLACK ANNEALED WIRE	9ga (3.77mm) ~ 18ga (1.21mm)	50 lbs, 500lbs & 1,500lbs coils
BAW (Rebar Tie Wire)	16ga (1.59mm)	3-1/2 lbs coil x 20 coils per box

WIRE/NAIL/STAINLESS STELL ROPE/STAINLESS STEEL WIRE

----CHINA

WIRE :

Fence Mesh for (Nulcear Powerprojects, Gym, Airport Expressway, etc.)

锌/锌5%铝/锌10%铝合金镀层钢丝
Zinc/Zinc 5% Aluminum-Mixed/Zinc 10% Aluminum-Mixed

线径：2.0-6.0mm
锌层：30g-600g/m²
抗拉强度：340-500Mpa
包装：卷式，500-800kg

Size: 2.0-6.0mm
Zinc Coating: 30g-600g/m²
Tensile Strength: 340-500Mpa
Packing: Coil, 500-800kg

PVC/PE挂胶涂塑钢丝
PVC/PE Glued Wire

线径：2.0-6.0mm
抗拉强度 340-500Mpa
包装：卷式，500-800kg
标准：JIS,KS,ASTM,BS,GB

Size: 2.0-6.0mm
Tensile Strength: 340-500Mpa
Packing: Coil, 500-800kg
Standard: JIS, KS, ASTM, BS, GB

石笼网
Gabion Mesh

线径：2.0-6.0mm
抗拉强度 340-500Mpa
包装：卷式
标准：JIS,KS,ASTM,BS,GB

Size: 2.0-6.0mm
Tensile Strength: 340-500Mpa
Packing: Coil
Standard: JIS, KS, ASTM, BS, GB



石笼网箱
Gabion Box

线径：2.0-6.0mm
抗拉强度 340-500Mpa
包装：箱式 200cm X100cm X100 cm
400 cm X100 cm X100 cm
标准 (Standard): JIS,KS,ASTM,BS,GB

Size: 2.0-6.0mm
Tensile Strength: 340-500Mpa
Packing: 200 cm X100 cm X100 cm
400 cm X100 cm X100 cm
Standard: JIS, KS, ASTM, BS, GB

Galvanized Wire Used For Fruit Bags

规格：0.50mm-0.70mm
抗拉强度：300-500Mpa
锌层： 12g-40g/m^2
包装：轴式，7kg/14 kg
标准：GB/T343

Size: 0.50mm-0.70mm
Tensile Strength: 300-500 Mpa
Zinc Coating: 12g-40g/m^2
Packing: Spool, 7kg/14 kg
Standard: GB/T343

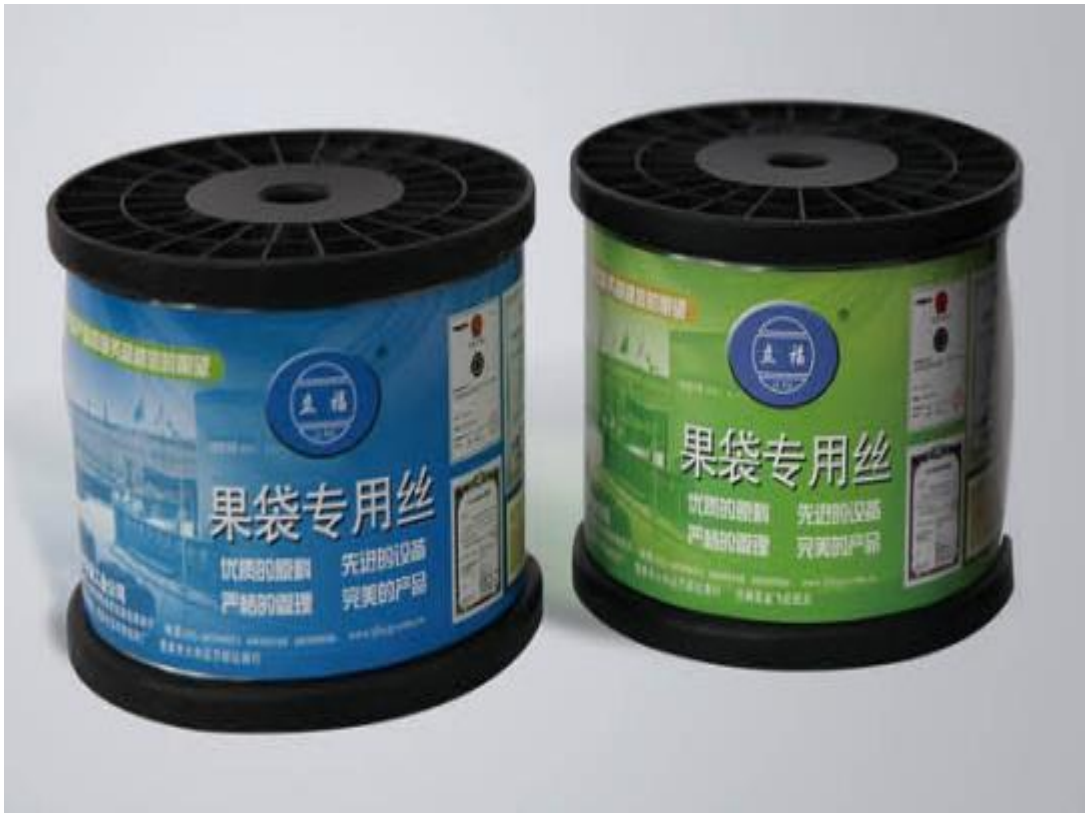

Galvanized Wire Used For Greenhouse

线径：1.8-4.0mm	Size: 1.8-4.0mm
抗拉强度：400-1700Mpa	Tensile Strength: 400-1700 Mpa
锌层：40 -920g/m^2	Zinc Coating: 40 -920g / m^2
涂层：锌 / 锌 5% 铝合金 10% 铝	Coating: Zinc/ Zn-5%Al / Zn-10%Al
包装：卷式，轴式，	Packing: Coil, Spool
标准：ASTM；BSEN；JIS；KS；GB/T；YB/T；AS；GOST；DIN；CSA	Standard: ASTM; BSEN; JIS; KS; GB/T; YB/T; AS; GOST; DIN; CSA

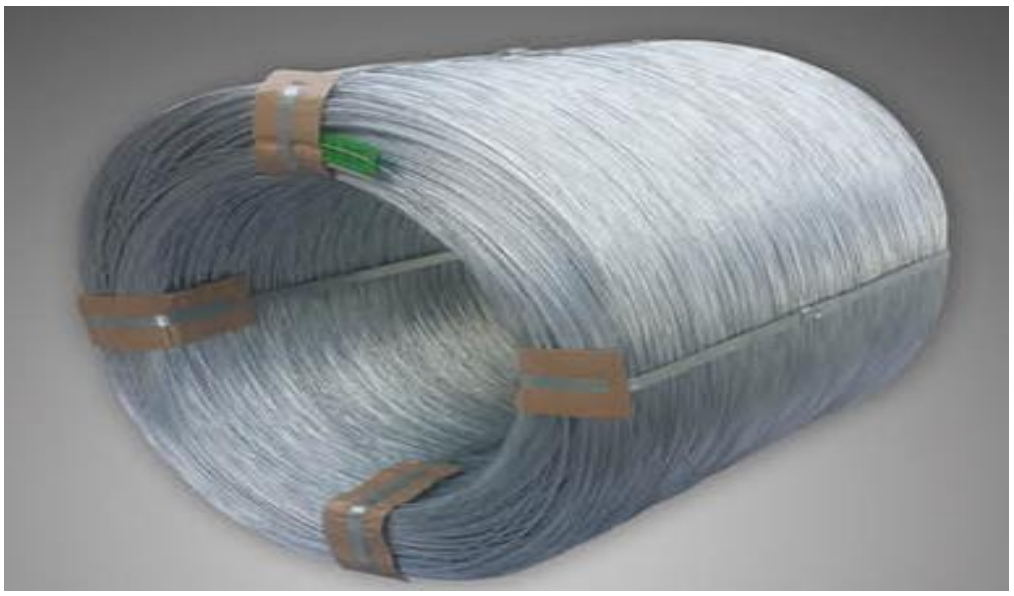

Agricultural Equipment

圆形喂草器
Round Hay Feeder

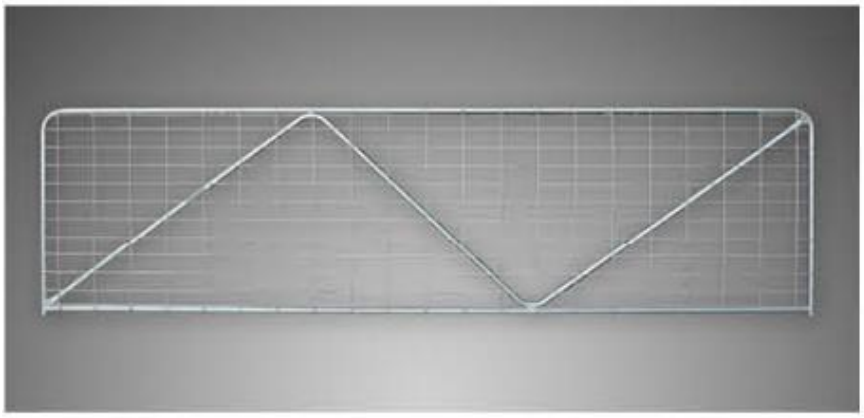

金属门
Farm Gate

围栏
Cattle Panel

Optical Cable Communication Industry

电缆（海底电缆）铠装用镀锌钢丝
Galvanized Steel Wire For (Submarine) Cable Armouring

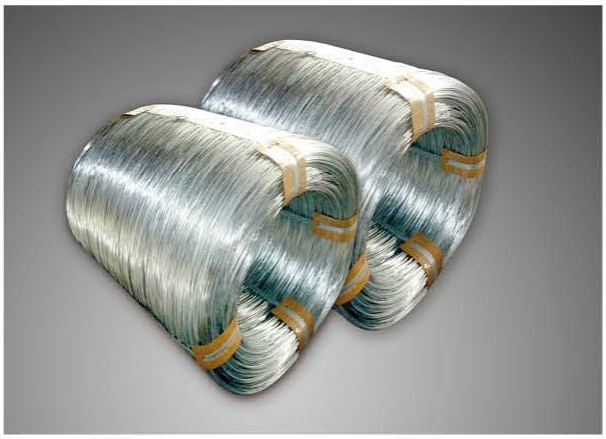

线径：0.6-8.0mm	Size: 0.6-8.0mm
涂层：锌 / 锌 5% 铝合金	Coating: Zinc/Zinc 5% Aluminum
抗拉强度：290-800 Mpa	Tensile Strength: 290-800 Mpa
锌层：200-600 g/m^2	Zinc Coating: 200-600 g/m^2
包装：卷式，800 公斤；	Packing: Coil, 800kg

船用电缆屏蔽用镀锌钢丝
Galvanized Steel Wire For Marine Cable Shielding

线径：0.20- 0.55mm
抗拉强度：320- 480 Mpa
锌层：12- 30 g/m²
包装：轴式

Size: 0.20-0.55 mm
Tensile Strength: 320-480 Mpa
Zinc Coating:12-30 g/m²
Packing: spool

电力架空导线用钢丝及钢绞线
Galvanized Steel Wire For Marine Cable Shielding

线径：1.57-4.77mm
绞线结构： 1*3; 1*7; 1*19; 1*37
抗拉强度：1300-1960Mpa 以上
锌层：210-900 g/m²
包装：卷式，轴式，Z2, Z3
标准：ASTM B498，ASTM A475，ASTM A 363，BS EN 50189，BS EN 183，JIS G 3537，GB/T3428(G1A-G5A)，IEC 60888，YB/T 5004。

Size: 1.57-4.77mm
1*3; 1*7; 1*19; 1*37
Tensile Strength: 1300-1960Mpa
Zinc Coating: 210-900g/m²
Packing: Coil, Spool, Z2, Z3
Standard: ASTM B498, ASTM A475, ASTM A 363, BS EN 50189, BS EN 183, JIS G 3537, GB/T3428(G1A-G5A), IEC 60888, YB/T 5004

光通讯增强用磷化钢丝
Phosphate Steel Wire For Optical Communication Enhancement

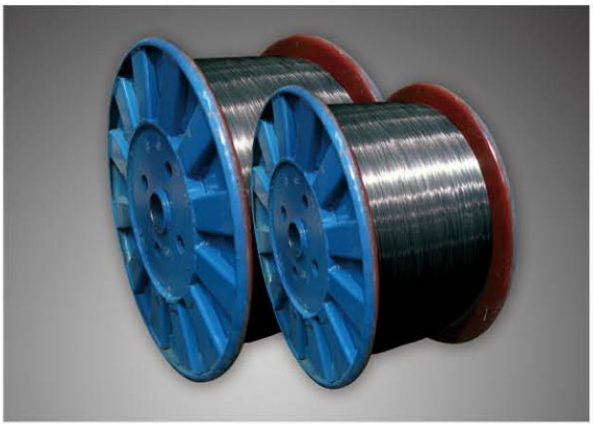

线径：0.3-3.0mm
抗拉强度：1500-2300 Mpa
包装：轴式

Size: 0.3-3.0mm
Tensile Strength: 1500-2300Mpa
Packing: Spool

PVC/PE 挂胶涂塑铁丝，菱形网
Steel Fiber Wire

自主研发的挂胶技术使 PVC 和铁丝紧紧粘在一起，没有间隙，不会像普通涂塑丝那样产生开裂和脱皮的现象。荣获国家发明专利，是国内唯一能承接核电工程的供应商。

规格：2.0-4.0mm

包装：卷式

Independently researched developed hanging glue technology make PVC coating and steel wire stuck together tightly. It won't have cracking and peeling phenomenon of ordinary plastic coated wire occurred. We won the national invention patent, and we are the only one supplier who can undertake nuclear power projects in China.

Size: 2.0-4.0mm

Packing: Coil

Housing, Road, Bridge Construction, Home Decoration

钢筋焊接网
Steel Fiber Wire

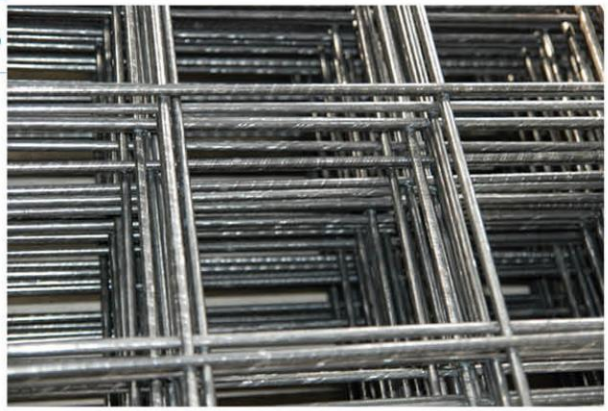

钢筋直径：4-12mm
原材料：CRB550 级冷轧带肋钢筋 /HRB400 级热轧带肋钢筋
标准：GB/T1499.3-2002、AS/NZS 4671：2001、BS 4483:2005、A185/A185M-07

Size:4-12mm
Raw Material:CRB550cold rolled ribbed steel barHRB400hot rolled ribbed steel bars
Standard:GB/T1499.3-2002, AS/NZS 4671:2001, BS 4483:2005:A185/A185M-07

房屋加固用镀锌钢丝
Galvanized Wire Used For Reinforcing Of Buildings

线径：0.63-1.6mm
抗拉强度：350-500Mpa
锌层：45 g/m²
包装：卷式，800kg

Size: 0.63-1.6mm
Tensile Strength: 350-500Mpa
Zinc Coating: 45 g/m²
Packing: Coil, 800kg

高品质建筑绑扎线
High Quality Building Binding Wire

线径：0.8mm
抗拉强度：350-550Mpa
锌层：15g/m²
包装：轴式，400g

Size: 0.8mm
Tensile Strength: 350-550Mpa
Zinc Coating: 15g/m²
Packing: Spool, 400g

钢纤维丝
Steel Fiber Wire

丝经：0.45-1.2mm
抗拉强度：800-1200MPA
表面：光亮或镀锌
包装：轴式

SIZE：0.45-1.2mm
Tensile Strength:
800-1200MPA
Surface:
BRIGHT OR GALVANIZE
PACKING：SPOOL

工艺用镀锌钢丝
Galvanized steel wire for process

线径：0.15-1.6mm
抗拉强度：350-500Mpa
锌层：15g/m^2
包装：卷式，轴式，2kg-16kg

Size：0.15-1.6mm
Tensile strength:
350-500Mpa
Zinc coating：15g/m^2
Packing：coil，spool，
2kg-16kg

涂塑六角网
Plastic Coated Hexagonal Wire Mesh

包装方式：
网孔：1~3/8 英寸
网宽：1 米
网长：200 米
标准：GB/T343

Packing:
Mesh：1”~3/8”
Width Of Mesh: 1m
Length Of Mesh: 200m
Standard：GB/T343

木箱钉用线、家具钉用线、家居装修钉用线
Wooden Case Nail Wire Staple Wire

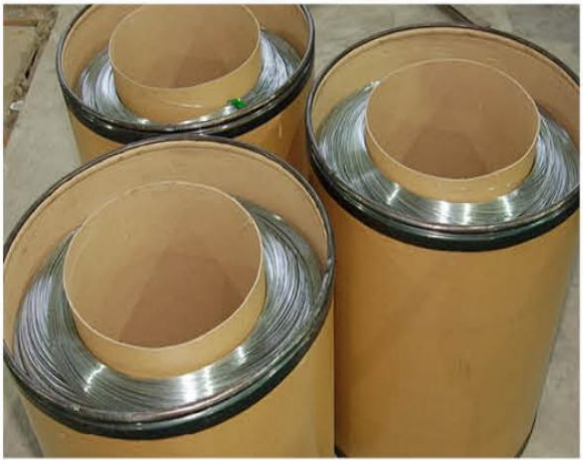

丝径：0.4-2.00mm
抗拉强度：900-1200Mpa
上锌量：8-16g/m^2
包装：卷式、轴式

Size：0.4-2.00mm
Tensile Strength：
900-1200Mpa
Zinc Coating：8-16g/m^2
Packing：Coil、Spool



黑软丝
Black Annealed Wire

线径：0.63-4.5mm
强度：350-500 Mpa
包装：卷式，轴式

Size: 0. 63-4.5mm
Tensile Strength: 350-500 Mpa
Packing: Coil，Spool

围栏网用镀锌钢丝（镀锌层和镀锌 5% 铝合金层）
Wire for mesh & fence(zine or GFAN)

钢丝线径： 1.2-8.0mm
锌层含量： 40g/m2～800g/m²
包装： 卷式 coil， 轴式 spool， Z2, Z3
标准： JIS G 3547, YB/T 5294; BS EN 10244-2; ASTM A641; etc.

Size:1.2-8.0Mm
Zine:40g/m2～800g/m²
Packing: coil, spool, z2, z3
Standard: jis g 3547, yb/t 5294; bs en 10244-2; astm a641; etc.

园艺绑扎
Gardening Binding Wire

规格：0.3mm-6.0mm
包装：0.01kg-10kg

Size: 0.3mm-6.0mm
Packing: 0.01kg-10kg

围栏桩、焊网
Fence Accesories

镀锌电焊网
Galvanized Welded Wire Mesh

T/L 型桩
T/L Post

其他围栏装
Other Fence Posts

3

园艺绑扎
Gardening Binding Wire

规格：0.3mm-6.0mm
包装：0.01kg-10kg

Size: 0.3mm-6.0mm
Packing: 0.01kg-10kg

Cultural And Educational Printing And Daily Necessities
文教印刷以及生活用品

书钉线、骑马钉线
Stitching Wire

书钉线、骑马钉线
丝径： 0.4-1.00mm
尺寸公差： ±0.01mm
抗拉强度： 925-1200MPA
上锌量： 8-16g/m²
包装：2-500KG 轴式

Size: 0.4-1.00mm
Tolerance: ±0.01mm
Tensile Strength: 925-1200Mpa
Zinc Coating: 8-16G/m²
Packing:2-500Kg, Spool

制刷用线
Brush Wire

丝径：0.45-2.0mm
抗拉强度：700-900 或 1900-2100MPA
上锌量：10-25g/m²
包装：卷式、轴式

Size:0.45-2.0mm
Tensile Strength:700-900 / 1900-2100Mpa
Zinc Coating:10-25G/m²
Packing:coil, Spool

尼龙线
Nylon Wire

颜色：白黑红橙黄绿青兰紫等
规格：0.45--1.50mm
抗拉强度:550-750 或 930-1150Mpa
包装：轴式

Color: White Black And Red, Orange, Yellow, Green, Dragonhead Purple, etc
Size: 0.45--1.50mm
Tensile Strength: 550-750 / 930-1150Mpa
Packing：Spool

镀锌改拔细丝
Galvanize Drawing Wire

丝径：0.11-0.13-0.16-0.18-0.20-0.25-0.30-0.35-0.40mm
抗拉强度：900-1120Mpa
铁丝表面：镀锌或光亮
包装：轴式
Size: 0.11-0.13-0.16-0.18-0.20-0.25-0.30-0.35-0.40mm
Tensile Strength: 900-1120Mpa
Packing: Spool
Surface: Galvanize Or Bright

提把手丝
Handle Wire

丝经：2.6-3.15-3.65-4.0mm
抗拉强度：650-850Mpa
表面：镀锌
包装：卷式

Size: 2.6-3.15-3.65-4.0mm
Tensile Strength: 650-850Mpa
Packing: Coil
Surface: Galvanize Or Bright

衣架丝
Coathanger Wire

丝经：1.6-1.8-2.0-2.2mm
强度：700-900Mpa
表面：镀锌
包装：卷式

Size: 1.6-1.8-2.0-2.2mm
Tensile Strength: 700-900Mpa
Surface: Galvanize
Packing: Coil

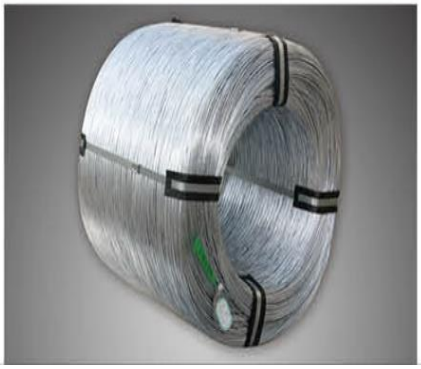



发卡丝

丝经：0.88-0.99-1.13-1.4mm
表面：镀锌或磷化
包装：轴式 90-500kg/ 轴

Size: 0.88-0.99-1.13-1.4mm
Surface: Galvanized
Packing: Spool 90-500kg

Lndustrial Supplies
工业用品

过滤网用镀锌钢丝

线径：0.15-1.0mm
抗拉强度：320-500 Mpa
包装：轴式

size: 0.15-1.0mm
Tensile Strength: 320-500 Mpa
Packing: Spool

改拔用镀锌钢丝
Galvanized Wire Used For Redrawing

线径：1.5-6.0mm
包装：卷式，轴式

Size:1.5-6.0mm
Packing: Coil, Spool

打包用镀锌钢丝
Baling Galvanized Wire

钢丝线径：1.8-3.66mm
锌层：30g-70g
强度：880-1600Mpa
包装：卷式，Z2，托盘式，铁架式

Size: 1.8-3.66mm
Zine: 30g-70g
Ensile Strength:880-1600Mpa
Packing: Coil, Z2, Pallet, Spider

铅淬火钢丝（镀锌 & 磷化）
Patented Steel

钢丝线径：1.5-6.0mm
强度：800-1300Mpa
包装：卷式，轴式

Size:1.5-6.0mm
Ensile Strength:800-1300Mpa
Packing: Coil,Spool



黑软丝
Black Annealed Wire

线径：0.63-4.5mm
包装：卷式，轴式

Size: 0.63-4.5mm
Packing: Coil, Spool

压扁丝
Flat Wire

丝径：2.50mm×0.50mm
2.20mm×0.60mm
2.20mm×0.70mm
1.80mm×0.60mm
1.50mm×0.50mm
0.90mm×0.60mm
0.80mm×0.50mm
抗拉强度：650-950/MPa
丝经公差：±0.05mm
表面：镀锌或镀铜

Size: 2.50mm×0.50mm
2.20mm×0.60mm 2.20mm×0.70mm
1.80mm×0.60mm 1.50mm×0.50mm
0.90mm×0.60mm 0.80mm×0.50mm
Tensile Strength: 650-950/MPa
Tolerance：±0.05mm
Surface：Galvanized Or Copper

钢棉丝
Steel Wool Wire

丝径：2.5-3.0-3.5-3.8mm
抗拉强度：600-900N/Mpa
包装：Z2 卷、卷式 Z2

Size:2.5-3.0-3.5-3.8mm
Tensile Strength: 600-900n/Mpa
Packing: Z2 Coil, Coil

爆破线专用镀锌钢丝
Blasting wire

钢丝线径：0.52mm
锌层：12g/m^2
包装：卷式，8kg-16kg
标准：GB/T343

Size: 0.52mm
Zinc Coating: 12g/m^2
Packing: Coil, 8kg-16kg
Standard: GB/T343

制钉用镀锌钢丝（镀锌层和镀锌 5% 铝合金层）
Nail Galvanized Wire (Galvanized And Galvanized 5% Aluminum Alloy Layer)

线径：1.6mm-5.0mm
抗拉强度：800-1150 Mpa
锌层：8-16g/m^2
包装：轴式，45kg-500kg

Size:0.48-2.0mm
Tensile strength:800-1150 Mpa
Zinc coating:8-16g/m^2
Packing: spool,45kg-500kg

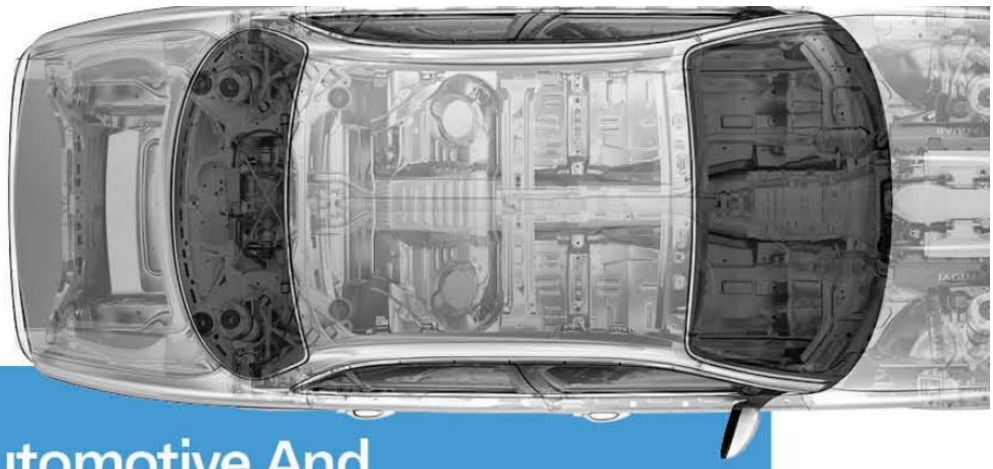

Automotive And Transport Steel Wire
汽车及交通工具类用钢丝

汽车密封条骨架钢丝
Car Seal Strip Steel Wire

丝经 :0.50-0.75-0.78-0.90mm
抗拉强度：950-1150Mpa
表面：镀锌
包装：轴

Size: 0.50-0.75-0.78-0.90mm
Tensile Strength: 950-1150Mpa
Surface: Galvanized
Packing: Spool

汽车内饰用钢丝（镀锌 & 光亮）
Steel Wire For Interior Parts(Galvanized & Bright)

线径：2.0-8.0mm
抗拉强度：500-1800Mpa
包装：卷式，轴式，Z2，Z3

Size: 2.0-8.0mm
Tensile Strength: 500-1800Mpa
Packing: Coil, Spool, Z2, Z3

安全气囊用光亮退火丝
Bright Annealed Wire For Airbag

钢丝线径：0.2-0.9mm
包装：卷式，轴式

Size: 0.2-0.9mm
Packing:coil, spool

汽车排气管消声器用丝
Galvanized Wire For Automotive Exhaust Muffler

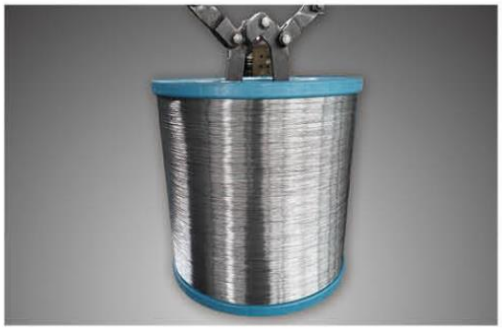

线径：0.2-0.3-0.4-0.6-0.8-0.9mm
抗拉强度：600-800Mpa
表面：光亮
包装：轴式

Size: 0.2-0.3-0.4-0.6-0.8-0.9mm
Tensile Strength: 600-800Mpa
Surface: Bright
Packing: Spool

汽车拉锁用钢丝（镀锌层和镀锌 5% 铝合金层）
Steel Wire For Control Cable (Galvanized & Phosphated)

线径：0.3-3.0mm
抗拉强度：1300-1900Mpa
包装：卷式，轴式，Z2, Z3
标准：EN10264-2 ,GB/T4357, etc.

Size: 0.3-3.0mm
Tensile Strength: 1300-1900Mpa
Packing: Coil, Spool, Z2, Z3
Standard: EN10264-2, GB/T4357, etc.

辐条钢丝
Spokes Steel Wire

丝经：1.8-2.0-2.3mm
抗拉强度：1200-1400Mpa
表面：镀锌
包装：卷式

Size: 1.8-2.0-2.3mm
Tensile Strength: 1200-1400Mpa
Surface: Galvanized
Packing: Coil

Steel Wire Rope Series
钢丝绳产品系列

电梯绳
Elevator rope

我公司生产电梯用钢丝绳，产品符合国标、日标、英标等标准。

We produce the elevator steel wire rope which meet the National standard, Japanese standard, British standard.

镀锌绳
Galvanized Rope

我公司生产点接触、线接触等镀锌钢丝绳、锌铝合金镀层钢丝绳，适用于船舶、航空、起重等领域。

We produce many kinds of galvanized steel wire rope, aluminum-galvanized alloy steel wire rope, applicable to ships, aviation and lifting and other fields.

光面绳
Smooth Wire

多股绳，18*7、35W*7 等产不旋转钢丝绳适应于起重、吊装等特种设备。

Multi-strand rope, 18 * 7,35 W * 7 and other production does not rotate wire rope to adapt to lifting, lifting and other special equipment.

锻打绳
Forged Rope

我司生产的锻打钢丝绳主要用于矿山提升，林业吊装等领域，适用寿命大大高于普通光面绳。

Our production of forged steel wire rope for mine hoist, hoisting forestry and other fields, for life is higher than the ordinary smooth rope.

汽车模具
Car Mold

电子产品模具
Electrical Mold

冲压产品
Stamping Products

Injection Molding Part Series
注塑部件产品系列

电子
Electrical

汽车
Car

医疗
Medical

光学
Optical

消防
Fire-
fighting

Galvanized Steel Products Series
钢件镀锌类产品系列

Zinc coating production line

Electro galvanized wire

SIZE: BWG8 — BWG 24
Zinc coating: 10g — 25g/m2
Tensile strength: 30 — 50kgs/mm2
Packing: 0.5kg — 800kgs per coil

Small Electro galvanized wire

Electro galvanized wire

12

Hot dipped galvanized wire

SIZE: BWG4 — BWG 24
Zinc coating: 35g — 360g/m2
Tensile strength: 30 — 50kgs/mm2 or 120 — 165kgs/mm2
Packing: 25kg — 800kgs per coil

Black annealed soft wire

SIZE: BWG8 — BWG 24
Tensile strength: 30 — 50kgs/mm2
Packing: 1kg — 600kgs per coil

Plastic coated wire

Small Coil Wire

Tensile strength: 30 — 47kgs/mm2
Packing: 3.5LB/coil

NAILS

Common nails:

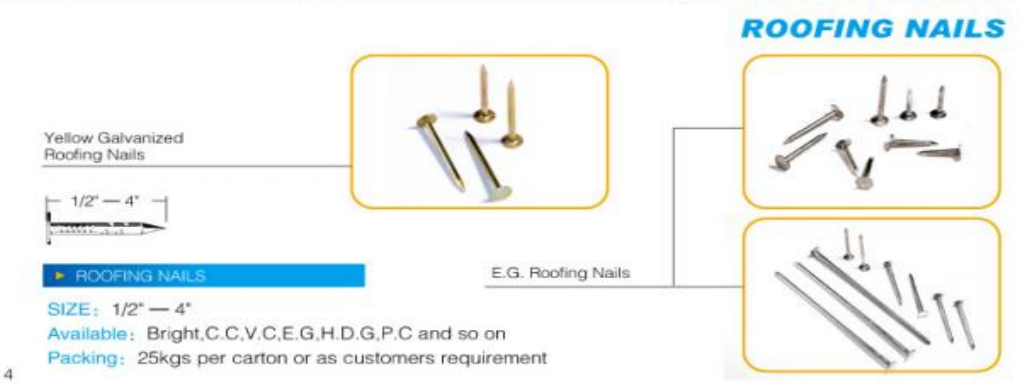



FINISHING NAILS

Iron wire, brad or brad with cup head, smooth shank, diamond point

SIZE: 1"—5"

Available: Bright,C.C,V.C,E.G,H.D.G,P.C and so on

Packing: 25kgs per carton or as customers requirement

LOST HEAD NAILS

SIZE: 1/2"—6"

Available: Bright,C.C,V.C,E.G,H.D.G,P.C and so on

Packing: 25kgs per carton or as customers requirement



CASING NAILS

SIZE: 1"—5"

Available: Bright,C.C,V.C,E.G,H.D.G,P.C and so on

Packing: 25kgs per carton or as customers requirement

BOX NAILS

Iron wire, flat head, Smooth Shank, Diamond point

SIZE: 1"—6"

Available: Bright,C.C,V.C,E.G,H.D.G,P.C and so on

Packing: 25kgs per carton or as customers requirement



SINKER NAILS

Iron wire, countersunk head, smooth shank, diamond point

SIZE: 1"—6"

Available: Bright,C.C,V.C,E.G,H.D.G,P.C and so on

Packing: 25kgs per carton or as customers requirement

ROOFING NAILS WITH NEOPRENE WASHER

For steel roofing and other flat roofing materials

Neoprene washer provides an effective waterproof sea.

SIZE: 1 1 /2" — 3 1/2"

Available: Bright,C.C,V.C,E.G,H.D.G,P.C and so on

Packing: 25kgs per carton or as customers requirement

ROOFING SCREW NAILS WITH WASHERS



ROOFING SCREW NAILS WITH WASHER

SIZE: 1 1/2"—6"

Available: Bright,C.C,V.C,E.G,H.D.G,P.C and so on

Packing: 100pcs per bag,10bags per carton,25kgs per carton or as customers requirement.

DUPLEX HEAD NAILS

SIZE: 1 3/4" — 4"

Available: Bright,C.C,V.C,E.G,H.D.G,P.C and so on

Packing: 25kgs per carton or as customers requirement

PLASTIC CAP NAILS

Iron wire, ring shank, diamond point

SIZE: 3/4" — 3"

Available: Bright,C.C,V.C,E.G,H.D.G,P.C and so on

Packing: 2,000 pcs per box, or 3,000 pcs in a pail

LEAD HEAD NAILS

For metal roofing applications.Lead head flattens out with impact,creating a seal against the metal roof.

SIZE: 1 1/2" — 2 1/2"

Available: Bright,C.C,V.C,E.G,H.D.G,P.C and so on

Packing: 25kgs per carton or as customers requirement

SPIKE

Iron wire, smooth shank or twisted shank, diamond point

SIZE: 6" — 14"

Available: Bright,C.C,V.C,E.G,H.D.G,P.C and so on

Packing: 25kgs per carton or as customers requirement

METAL ROUND CAP NAILS

Metal round cap, iron or steel wire, fluted shank, or ring shank, diamond point

SIZE: 3/4" — 4"

Available: Bright,C.C,V.C,E.G,H.D.G,P.C and so on

Packing: 25kgs per carton or as customers requirement

METAL SQUARE CAP NAILS

Iron wire, square head, ring shank, diamond point

SIZE: 3/4" — 4"

Available: Bright,C.C,V.C,E.G,H.D.G,P.C and so on

Packing: 25kgs per carton or as customers requirement

CONCRETE NAILS

SIZE: 1/2" — 4"

Fluted or Smooth Shank

Available: Bright,C.C,V.C,E.G,H.D.G,P.C and so on

Packing: 25kgs per carton or as customers requirement

CUT MASONRY NAILS

SIZE: 1" — 4"

Available: Bright,C.C,V.C,E.G,H.D.G,P.C and so on

Packing: 25kgs per carton or as customers requirement

U TYPE NAILS

SIZE: 1/2" — 4"

Available: Bright,C.C,V.C,E.G,H.D.G,P.C and so on

Packing: 25kgs per carton or as customers requirement



JOIST HANGER NAILS

SIZE: 1 1/2" XBWG9

Available: Bright,C.C,V.C,E.G,H.D.G,P.C and so on

Packing: 25kgs per carton or as customers requirement

ROOFING NAILS WITH UMBRELLA HEAD

SIZE: BWG8 — BWG13

Available: Bright,C.C,V.C,E.G,H.D.G,P.C and so on

Packing: 25kgs per carton or as customers requirement

SQUARE BOAT NAILS

SIZE: 1" — 6"

Available: Bright,C.C,V.C,E.G,H.D.G,P.C and so on

Packing: 25kgs per carton or as customers requirement

RING SHANK NAILS



▸ RING SHANK NAILS

SIZE: 1 1/2" — 6"

Available: Bright,C.C,V.C,E.G,H.D.G,P.C and so on

Packing: 25kgs per carton or as customers requirement

POLE BARN NAILS



▸ POLE BARN NAILS

Hardened steel nail, with heat treatment, ring shank, diamond point

SIZE: 2" — 10"

Available: Bright,C.C,V.C,E.G,H.D.G,P.C and so on

Packing: 25kgs per carton or as customers requirement

DRYWALL NAILS



▸ DRYWALL NAILS

Iron wire, flat head, countersunk head or cupped head, smooth or ring shank, diamond point

SIZE: 3/4" — 2 1/2"

Available: Bright,C.C,V.C,E.G,H.D.G,P.C and so on

Packing: 25kgs per carton or as customers requirement

FURRING NAILS

SIZE: 1 1/2" — 2"

Packing: 25kgs per carton or as customers requirement

For attaching stucco wire mesh to exterior of structure in preparation for the application of stucco mud,Nail with wad used with paper that does not have wadding preattached,Nail without wad used with paper that has wadding already attached

COIL ROOFING NAILS

Iron wire, with big head,

Available size: 3/4" — 1 3/4"

Surface treatment: Bright,C.C,V.C,E.G,H.D.G,P.C and so on

Packing: 7,200 pcs per carton

COIL NAILS

SOD STAPLE

STEEL WIRE ROPE:

- Ungalvanized Steel Wire Rope
- Galvanized Steel Wire Rope
- Alu-Zinc-Galv Steel Wire Rope
- Stainless Steel Wire Rope (AISI 304 , AISI 316 , AISI 316L)
- Stainless and Copper Wires mixed Wire Rope
- PVC/PP/PE/PA coated Steel Wire Rope
- Rigging of Steel Wire Rope

Rope Constructions and Diameter range:

- 1X7: 0.6mm ~ 12.0mm
- 1X19: 0.8mm ~ 18.0mm
- 1X37: 2.0mm ~ 14.0mm
- 6X7+FC, 6X7+IWS (7X7) : 0.54mm ~ 14.0mm
- 6X19+FC, 6X19+IWS (7X19) : 1.2mm ~ 30.0mm
- 6X19Filler+FC, 6X19Filler+IWRC: 6.0mm ~ 34.0mm
- 6X19Seale+FC, 6X19Seale+IWRC: 6.0mm ~ 25.0mm
- 6X19Warrington+FC, 6X19Warrington+IWRC: 6.0mm ~ 25.0mm
- 6X37+FC, 6X37+IWRC: 5.0mm ~ 34.0mm
- 6X36WS+FC, 6X36WS+IWRC: 8.0mm ~ 34.0mm
- 8X19Filler+FC, 8X19Filler+IWRC: 8.0mm ~ 16.0mm
- 8X19Seale+FC, 8X19Seale+IWRC: 8.0mm ~ 16.0mm
- 8X19Warrington+FC, 8X19Warrington+IWRC: 8.0mm ~ 16.0mm
- 8X7+FC, 8X7+1X19: 1.2mm ~ 14.0mm
- 18X7+FC, 19X7: 3.0mm ~ 26.0mm

- 35WX7: 8.0mm ~ 26.0mm

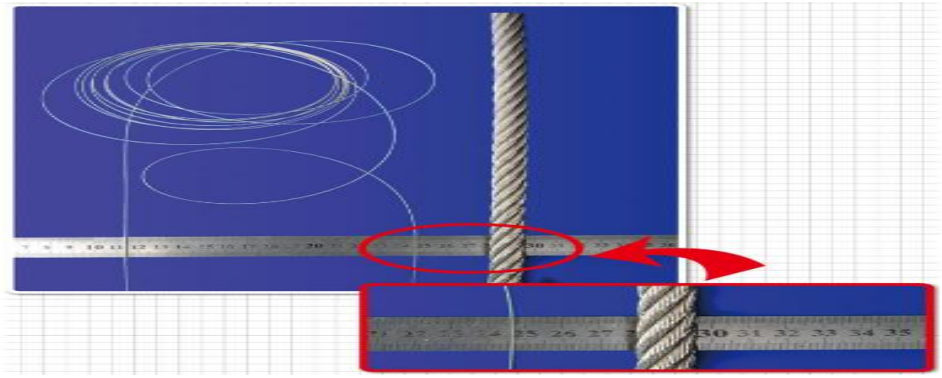

STAINLESS STEEL WIRE:

High quality 200, 300, 400 series stainless steel fine wires with diameter range from 0.08 to 2.00mm; soft annealed, 1/4 hard, 1/2 hard, full hard.

Main grades: 304, 304L, 304H, 316, 316L, 316Ti, 309, 309s, 310, 310s, 321, 314, 430 etc

Nickel and Nickel Alloy Wire - N4/N6

N4/N6 Nickel alloy wires - Excellent work abilities and mechanical properties, high melting point, good corrosion-resistance, sufficient heat-strengths.

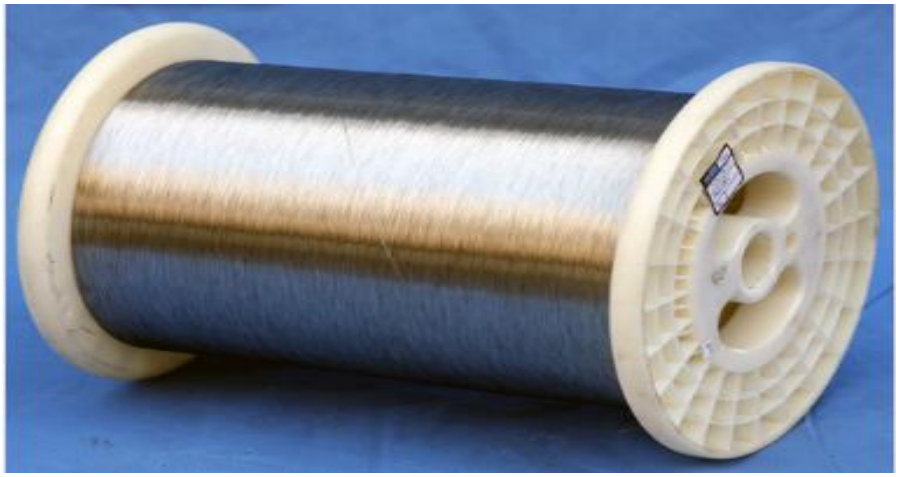

Inconel Alloy Wire - Inconel600 / Incoloy825

Inconel600 and Incoloy825 alloy wires, good oxidation resistance and mechanical properties.

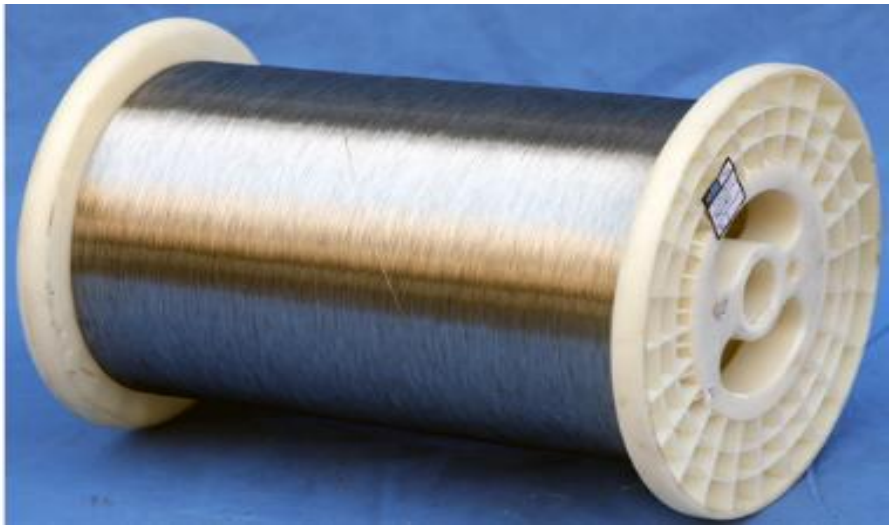

Nickel-Copper Alloy Wire - Monel Alloy

Monel 400 Nickel-copper alloy wires - Great work ability, good mechanical properties, excellent corrosion-resistance.

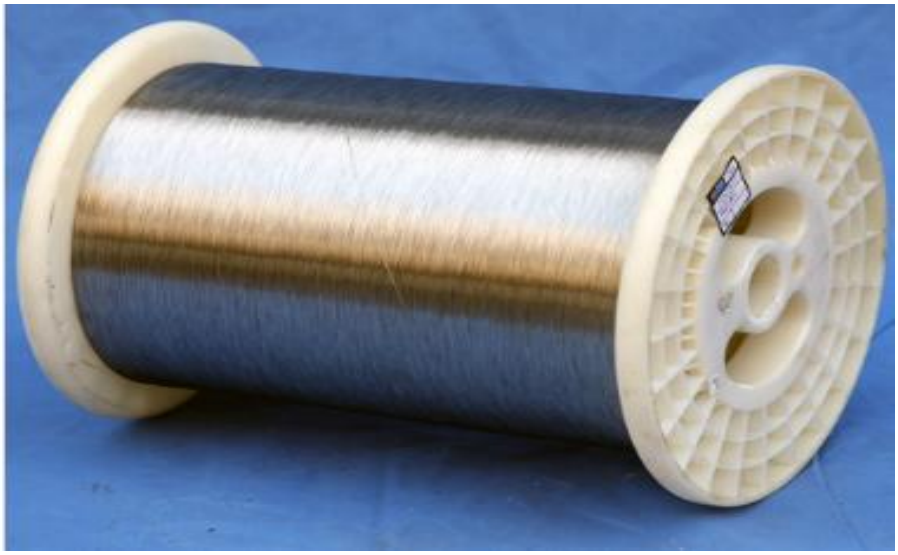

Galvanized Steel Wire

Low carbon steel electro-galvanized wire.

Stainless Steel Knitted Wire Mesh

stainless steel knitted wire mesh with high strength, flexibility, resilience, corrosion and wear resisting.

Stainless Steel Woven Wire Mesh

stainless steel woven mesh with smooth surface, rust-free, non-toxic, hygiene.

Also commonly called stainless steel mesh, stainless steel net, stainless steel screen.

Stainless Steel Diamond Mesh

New type of extremely tough and durable material for window/door shades. Mainly used as safety screen on windows and doors in home and office environments.

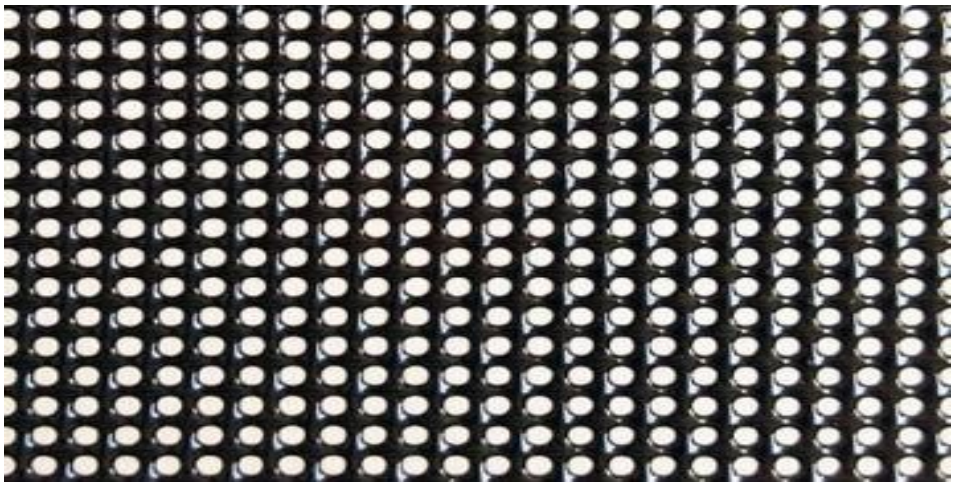

Stainless Steel Compressed Knitted Mesh

Stainless steel compressed knitted wire mesh are widely used in the automotive industry and other engineering fields as gaskets, filter, seals.

Stainless Steel Baskets

Stainless steel wire baskets are widely used in hospitals, kitchens, restaurants, etc.

Stainless Steel Filter Discs

Die-punched stainless steel wire mesh with optional edge rings, mainly used as filters and nozzles in varies industries.

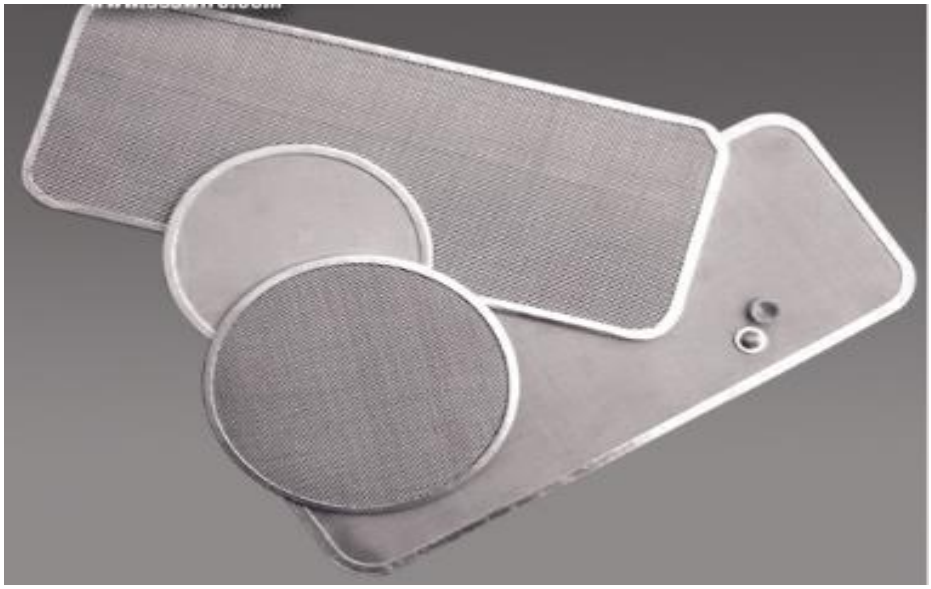

Steel Fiber

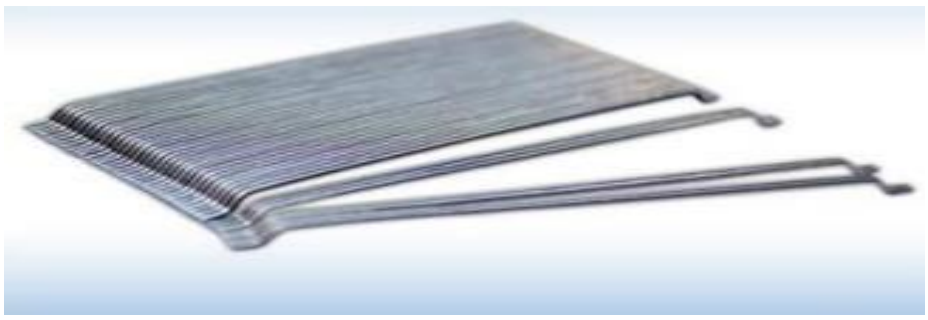

STAINLESS STEEL WIRE:

焊接线 Welding Wire

适用于牌号：ER308；ER308L；ER308LSI；ER308LHSI；ER309；ER309L；ER309LSI；ER309LHSI；ER316；ER316L；ER316LSI；ER316LHSI；ER321；ER410；etc.

用途：用作电焊条生产之焊条芯线，埋弧焊丝（SAW）、氩弧焊丝（TIG）、电弧焊丝（MIG）之半成品线。

Application: With steady chemical compositions, it can be used in welding and manufacturing semi-finished of SAW, TIG, MIG wire, etc.

以上焊接线符合AWS A5.9标准　All the above filler wires are complied with the AWS A5.9 standard.

异形线 Shaped Wire

适用于牌号：201；202；304；304H；302；303CU；316；

用途：可广泛使用于各种不同的异形用线产品，如扁丝被广泛用作生产汽车雨刮器、胸罩线、耳机线及纺织业片综等。

Application: Being apt for forming and machining, our shaped wire is widely used for various profiling wire such as brassiere wire, watch bands, earphone frames, filter, etc.

牌 号	化学成分 Chemcial composition%										材质特性 Mechanical properties
TYPE	C	Si	Mn	P	S	Ni	Cr	Mo	Cu	Others	
201	0.15	1.00	5.5-7.5	0.060	0.030	3.50-5.50	16.0-18.0	-	-	N≤0.25	属节镍钢种,冷加工后有磁性,可代替SUS301使用
202	0.15	1.00	7.5-10.0	0.060	0.030	4.00-6.00	17.0-19.0	-	-	N≤0.25	无磁、高强度，耐腐蚀，适用影象、电脑等内部零件轴心
304	0.08	1.00	2.00	0.045	0.030	8.0-10.0	18.0-20.0	-	-		有良好的耐蚀性，被广泛使用。
304H	0.06-0.10	1.00	2.00	0.045	0.030	8.0-10.0	18.0-20.0	-	-		有良好的防腐蚀能力，冷加工后有较高的强度。
302	0.15	1.00	2.00	0.045	0.030	8.0-10.0	17.0-19.0	-	-		具有良好的在硝酸、大部分有机酸和无机酸、水溶液、磷酸，碱及煤气等介质中的耐蚀性。冷加工后有高的强度。
303CU	0.15	1.00	3.00	0.045	≥0.15	8.0-10.0	17.0-19.0	0.60	1.5-3.5		属易车削钢种，适用自动车床。
316	0.08	1.00	2.00	0.045	0.030	10.0-14.0	16.0-18.0	2.0-3.0	-		在海水及各种有机酸等介质中，耐腐蚀性优于SUS304。

网线、耐热编织线 Weaving Wire, Braiding Wire

适用于牌号： 304；316；321；309S；310S；314；347；631（J1）；etc.

用途： 不锈钢网线、编织线广泛用于编织普通网，筛网及耐热输送网，广泛应用于石油、化工、食品加工、粉末冶金等诸多行业。

Application: It can be used in weaving general nets, heat resistance belts, and also widely used for chemical, food processing, petroleum, kitchen utensils, paper and pulp and conveyer belt industries.

牌 号	化学成分 Chemcial composition%										材质特性 Mechanical properties
TYPE	C	Si	Mn	P	S	Ni	Cr	Mo	Cu	Others	
304	0.08	1.00	2.00	0.045	0.030	8.0-10.0	18.0-20.0	-	-		有良好的耐蚀性，被广泛使用。
316	0.08	1.00	2.00	0.045	0.030	10.0-14.0	16.0-18.0	2.0-3.0	-		在海水及各种有机酸等介质中，耐腐蚀性优于SUS304。
321	0.08	1.00	2.00	0.045	0.030	9.0-13.0	17.0-19.0	-	-	Ti≤5*c%	在SUS304中添加Ti，有更良好的耐腐蚀性，使用于制造焊芯，抗磁仪表零件。
309S	0.08	1.00	2.00	0.045	0.030	12.0-15.0	22.0-24.0	-	-		耐热线，抗氧化性好。
310S	0.08	1.50	2.00	0.045	0.030	19.0-22.0	24.0-26.0				耐热线，抗氧化性好。
314	0.25	1.5-3.0	2.00	0.040	0.030	19.0-22.0	24.0-26.0	-	-		抗氧化性好，使用上多作为耐热钢使用。
347	0.08	1.00	2.00	0.045	0.030	9.0-12.0	17.0-19.0	-	-	Nb: 10c-1.10	含Nb.有高抗晶间腐蚀性能，适宜高温下使用的焊接构件。
631（J1）	0.09	1.00	1.00	0.040	0.030	6.50-8.50	16.0-18.0	-	-	AL: 0.75-1.5	耐热弹簧作用，时效处理钢。

EPQ WIRE

光亮面线（电解抛光线） Electro Polishing Quality (EPQ) Wire

适用于牌号： 304；316；304ES(T)；201CU；D668/204CU；D667/200CU；430；430LXJ1/160；430LXJ2/180；410；etc.

用途： 具有细致、光亮的表面，良好的成型性、弱磁性和不易开裂。电解抛光线大量应用于自行车配件，厨卫、食品、医疗器械；如自行车车篮、辐条、货架及支撑，厨卫置物架或篮框，烘烤箱内置钢架，宠物笼，医疗及食品相关器械配件等。

Application: With bright surface, slight magnetism and no cracks in forming, it is widely used in manufacturing bicycle fittings, kitchen and sanitation tools, goods shelf, pet cages, grill racks, decorative handles and baskets, food and medical machinery accessories, etc.

牌 号	化学成分 Chemcial composition%										材质特性 Mechanical properties
TYPE	C	Si	Mn	P	S	Ni	Cr	Mo	Cu	Others	
304	0.08	1.00	2.00	0.045	0.030	8.0-10.0	18.0-20.0	-	-		有良好的耐蚀性，被广泛使用。
316	0.08	1.00	2.00	0.045	0.030	10.0-14.0	16.0-18.0	2.0-3.0	-		在海水及各种有机酸等介质中，耐腐蚀性优于SUS304。
304ES(T)	0.12	1.00	2.0-4.5	0.045	0.030	6.0-8.0	16.0-18.0	0.50	2.0-3.0	N≤0.1	属节镍钢种，具有冷加工性和耐腐蚀性
201CU	0.12	1.00	7.5-10.0	0.045	0.030	3.50-5.50	13.5-16.0	0.50	2.0-3.0	N≤0.1	属节镍钢种，具有冷加工性和耐腐蚀性
D668/204CU	0.12	1.00	11.0-15.0	0.045	0.030	1.50-2.50	12.5-14.0	0.60	1.5-2.50	N≤0.1	属节镍钢种，具有冷加工性和耐腐蚀性
D667/200CU	0.12	1.00	11.0-15.0	0.045	0.030	0.5-1.50	12.5-14.0	0.60	1.5-2.50	N≤0.1	属节镍钢种，具有冷加工性和耐腐蚀性料
430	0.12	0.75	1.00	0.045	0.030	-	16.0-18.0	-	-		有抗氧化性介质腐蚀的能力，但有晶间腐蚀倾向。
430LXJ1/160	0.03	1.00	1.00	0.045	0.030	0.20-0.60	16.5-18.0	0.50	0.20-0.60	Nb: 0.30-0.70	具较强的韧性。
430LXJ2/180	0.03	1.00	1.00	0.045	0.03	0.20-0.60	18.0-19.5	0.50	0.20-0.60	Nb: 0.30-0.70	具较强的韧性。
410	0.15	1.00	1.00	0.040	0.030	-	11.5-13.5	-	-		具有一定的硬度，塑性和韧性，高温下具有耐盐水溶液，硝酸和某些浓度不高的有机酸等介质的能力。

Redrawing, annealing wire

再伸线、退火软线 Redrawing, Annealing Wire

适用于牌号： 304；304M；304L；AISIL304L；302；304H；321；316；316L；AISIL316L；347；430；430LXJ1/160；430LXJ2/180；etc.

用途： 为下游企业提供中间母线，用以生产极细线、细弹簧线、针灸线或压轧异形线。

Application: Supplying good elongation generatrix for other manufactures in the lines of filament drawing, producing fine spring wire, acupuncture wire and pressed wires, etc.

牌 号	化学成分 Chemcial composition%										材质特性 Mechanical properties
TYPE	C	Si	Mn	P	S	Ni	Cr	Mo	Cu	Others	
304	0.08	1.00	2.00	0.045	0.030	8.0-10.0	18.0-20.0	-	-		有良好的耐蚀性，被广泛使用。
304M	0.06	1.00	2.00	0.045	0.030	9.0-10.0	18.0-20.0	-	-		良好的防腐蚀能力，较好的拉线性能。
304L	0.03	1.00	2.00	0.045	0.030	9.0-11.0	18.0-20.0	-	-		耐晶间腐蚀性优越，使用于制造焊接后不进行热处理的部件类。
AISIL304L	0.03	1.00	2.00	0.045	0.030	8.0-10.0	18.0-20.0	-	-		耐晶间腐蚀性优越，使用于制造焊接后不进行热处理的部件类。
302	0.15	1.00	2.00	0.045	0.030	8.0-10.0	17.0-19.0	-	-		具有良好的在硝酸、大部分有机酸和无机酸、水溶液、磷酸、碱及煤气等介质中的耐蚀性。冷加工后有高的强度。
304H	0.06-0.10	1.00	2.00	0.045	0.030	8.0-10.0	18.0-20.0	-	-		有良好的防腐蚀能力，冷加工后有较高的强度。
321	0.08	1.00	2.00	0.045	0.030	9.0-13.0	17.0-19.0			Ti≤5*c%	具有较高的抗晶间腐蚀能力.在不同浓度、不同温度的有机酸和无机酸中，尤其是在氧化性介质中具有良好的耐腐蚀性能。
316	0.08	1.00	2.00	0.045	0.030	10.0-14.0	16.0-18.0	2.0-3.0	-		在海水及各种有机酸等介质中，耐腐蚀性优于SUS304。
316L	0.03	1.00	2.00	0.045	0.030	12.0-15.0	16.0-18.0	2.0-3.0	-		含碳量比SUS316更低抗晶间腐蚀性更好。为重要的耐腐蚀性材料。
AISIL316L	0.03	1.00	2.00	0.045	0.030	10.0-14.0	16.0-18.0	2.0-3.0	-		含碳量比SUS316更低抗晶间腐蚀性更好。为重要的耐腐蚀性材料。
347	0.08	1.00	2.00	0.045	0.030	9.0-12.0	17.0-19.0	-	-	Nb: 10c-1.10	含Nb,有高抗晶间腐蚀性能，适宜高温下使用的焊接构件。
430	0.12	0.75	1.00	0.045	0.030	-	16.0-18.0	-	-		有抗氧化性介质腐蚀的能力，但有晶间腐蚀倾向。
430LXJ1/160	0.03	1.00	1.00	0.045	0.030	0.20-0.60	16.5-18.0	0.50	0.20-0.60	Nb: 0.30-0.70	具较强的韧性。
430LXJ2/180	0.03	1.00	1.00	0.045	0.03	0.20-0.60	18.0-19.5	0.50	0.20-0.60	Nb: 0.30-0.70	具较强的韧性。

CD BAR, CG BAR

冷拔棒、磨光棒 CD Bar, CG Bar

冷拔棒CD Bar

适用于牌号： 304；303；303C；316；304ES；201CU；D667；D668；etc.

线径 Diameter: 1.0~25.0mm

长度 Length: Max. 5 meters

公司也可提供抛光处理后的抛光
The company can provide polished-finish polish sticks also.

磨光棒CG Bar

适用于牌号： 304；303；303C；316；410；420；420F；416；430F；etc.

线径 Diameter: 2.0~14.0mm

长度 Length: Max. 3.5meters

用途： 通常用于不锈钢轴、削、五金件等的生产。

Application: Used chiefly on production of stainless steel axis and hardwares.

牌 号	化学成分 Chemcial composition%										材质特性 Mechanical properties
TYPE	C	Si	Mn	P	S	Ni	Cr	Mo	Cu	Others	
304	0.08	1.00	2.00	0.045	0.030	8.0-10.0	18.0-20.0	-	-		有良好的耐蚀性，被广泛使用。
303	0.15	1.00	2.00	0.045	≥0.15	8.0-10.0	17.0-19.0	0.60	-		易车削性。
303CU	0.15	1.00	3.00	0.045	≥0.15	8.0-10.0	17.0-19.0	0.60	1.5-3.5		属易车削钢种，适用自动车床。
316	0.08	1.00	2.00	0.045	0.030	10.0-14.0	16.0-18.0	2.0-3.0	-		在海水及各种有机酸等介质中，耐腐蚀性优于SUS304。
304ES(T)	0.12	1.00	2.0-3.0	0.045	0.030	6.0-8.0	16.0-19.0	0.50	2.0-3.0	N≤0.1	属节镍钢种,具有冷加工性和耐腐蚀性
201CU	0.12	1.00	7.5-10.0	0.045	0.030	3.50-5.50	13.5-16.0	0.50	2.0-3.0	N≤0.1	属节镍钢种,具有冷加工性和耐腐蚀性
D668/204CU	0.12	1.00	11.0-15.0	0.045	0.030	1.60-2.50	12.5-14.0	0.60	1.5-2.50	N≤0.1	属节镍钢种,具有冷加工性和耐腐蚀性
D667/200CU	0.12	1.00	12.0-15.0	0.045	0.030	0.80-1.20	12.5-14.0	0.60	1.5-2.50	N≤0.1	属节镍钢种,具有冷加工性和耐腐蚀性料
410	0.15	1.00	1.00	0.040	0.030	-	11.5-13.5	-	-		具有一定的硬度，塑性和韧性，高温下具有耐盐水溶液，硝酸和某些浓度不高的有机酸等介质的能力。
416	0.15	1.00	1.25	0.060	≥0.15	-	12.0-14.0	-			较SUS410提高切削性，适用于自动车床加工。
420	0.16-0.25	1.00	1.00	0.040	0.030	-	12.0-14.0	-	-		切削性能佳。
420F	0.26-0.35	1.00	1.25	0.060	≥0.15	-	12.0-14.0	-	-		较420J2提高切削性，适用于自动机床加工
430F	0.12	1.00	1.25	0.060	≥0.15	-	16.0-18.0	-	-		较SUS430提高切削性，适用于自动车床加工。